



Grapples



Kesla proG grapples

	Weight	Area	Operating pressure	Jaw force	Max load
For timber					
proG20	70 kg	0,18 m ²	17,5 MPa	7 kN	1 500 kg
proG26	130 kg	0,24 m ²	21 MPa	11 kN	2 000 kg
proG25P	110 kg	0,20 m ²	19 MPa	11 kN	2 000 kg
proG28	170 kg	0,27 m ²	25 MPa	13 kN	3 000 kg
proG30	200 kg	0,30 m ²	25 MPa	16 kN	3 500 kg
proG35	215 kg	0,35 m ²	26 MPa	16 kN	4 000 kg
proG40	265 kg	0,40 m ²	26 MPa	21 kN	5 000 kg
proG46	270 kg	0,46 m ²	26 MPa	21 kN	5 000 kg
proG50	280 kg	0,50 m ²	26 MPa	21 kN	5 000 kg


For energy wood

proG26E	140 kg	0,15 m ²	21 MPa	12 kN	2 000 kg
proG30E	245 kg	0,21 m ²	25 MPa	18 kN	3 500 kg
proG40E	325 kg	0,25 m ²	26 MPa	21 kN	5 000 kg
proG40E3	300 kg	0,25 m ²	26 MPa	21 kN	4 000 kg
proG50E	380 kg	0,46 m ²	26 MPa	21 kN	5 000 kg
proG50E6	450 kg	0,46 m ²	26 MPa	21 kN	5 000 kg

	A	B	C	D	E	F
For timber						
proG20	1 235 mm	65 mm	320 mm	298 mm	670 mm	470 mm
proG26	1 315 mm	80 mm	404 mm	377 mm	810 mm	530 mm
proG25P	1 395 mm	40 mm	345 mm	185 mm	735 mm	480 mm
proG28	1 610 mm	100 mm	480 mm	442 mm	890 mm	580 mm
proG30	1 565 mm	100 mm	480 mm	442 mm	890 mm	580 mm
proG35	1 570 mm	125 mm	480 mm	442 mm	950 mm	615 mm
proG40	1 990 mm	140 mm	540 mm	503 mm	1 005 mm	675 mm
proG46	1 955 mm	140 mm	540 mm	503 mm	1 055 mm	660 mm
proG50	1 960 mm	130 mm	540 mm	503 mm	1 150 mm	680 mm

For energy wood

proG26E	1 343 mm	45 mm	404 mm	404 mm	825 mm	492 mm
proG30E	1 620 mm	70 mm	510 mm	500 mm	820 mm	570 mm
proG40E	1 955 mm	70 mm	575 mm	561 mm	965 mm	610 mm
proG40E3	1 955 mm	70 mm	575 mm	471 mm	965 mm	610 mm
proG50E	1 980 mm	140 mm	575 mm	561 mm	1 120 mm	675 mm
proG50E6	1 980 mm	140 mm	575 mm	561 mm	1 120 mm	675 mm

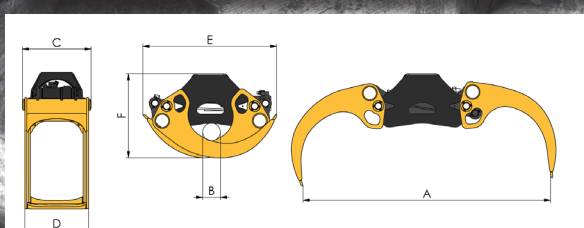

Kesla reserves the right for any alterations.

#yourlifetimematch